



EVERPURE® SR-X FEEDER/DELIMING SYSTEM

SUPERIOR SCALE PREVENTION AND CORROSION CONTROL FOR STEAM EQUIPMENT

SR-X Feeder and Deliming System: EV9797-20
SS-10 Replacement Cartridge: EV9799-02



APPLICATIONS

- Scale Reduction Applications
- Scale Reduction For Steam Applications
- Deliming Capabilities

FEATURES • BENEFITS

A complete system that effectively targets scale

Patented design dispenses a controlled amount of Hydroblend™ for long-term protection and provides greater effectiveness than standard phosphate treatments

A sophisticated blend of polyphosphate compound represents an advancement in scale inhibition

Provides protection against equipment corrosion

Clear bowl and cartridge make it easy to determine when Hydroblend™ compound is exhausted

System includes clear SR-X housing, SS-10 cartridge, dip tube assembly, and a 2.2 lb ScaleKleen package

The SS-10 is NSF® Certified under NSF/ANSI Standard 42 for material requirements only

SS-10 cartridge is more effective in higher alkalinity/hardness/TDS/temperature installations

INSTALLATION TIPS

Choose a mounting location suitable to support the full weight of the system when operating.

Make sure to properly lubricate o-ring prior to use.

Use 3/4" water line (optional reducer bushings included).

Install vertically with bowl hanging down.

Allow 2 1/2" (6.35 cm) clearance below the cartridge for easy cartridge replacement.

For steam applications, connect the system to the boiler water only. Do not connect to the condenser.

OPERATION TIPS

Deliming of equipment prior to application is recommended, but not required.

Inspect SS-10 cartridge at least every six (6) months.

Replace SS-10 cartridge before Hydroblend™ compound is completely dissolved.


Pre-existing equipment scale may come loose and clog equipment. Remove any loose scale to assure satisfactory operation.

SIZING

Service Flow Rate: Maximum 6.0 gpm (22.7 Lpm)

EVERPURE® SR-X FEEDER/DELIMING SYSTEM

EV9797-20

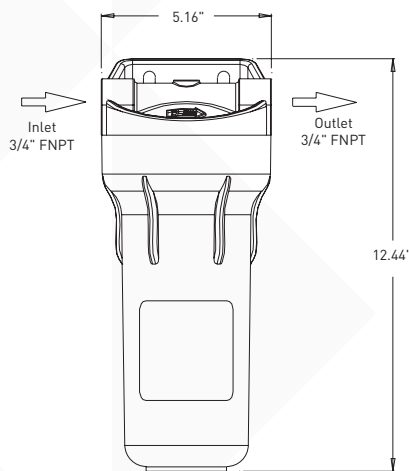

The contaminants or other substances removed or reduced by this drinking water system are not necessarily in your water. Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfection before or after the system.

SPECIFICATIONS

Service Flow Rate

Maximum 6.0 gpm (22.7 Lpm)

Pressure Requirements

10 - 125 psi (0.7 - 8.6 bar), non-shock

Temperature

35 - 100°F (2 - 38°C)

Overall Dimensions

12.44" L x 5.16" W x 5.5" D
(31.5 cm x 13.1 cm x 13.9 cm)

Inlet Connection

3/4"

Outlet Connection

3/4"

Operating Weight

6 lbs (2.7 kgs)

Shipping Weight

6 lbs (2.7 kgs)

Electrical Connection

None required

WARRANTY

Everpure water treatment systems by Pentair® (excluding replaceable elements) are covered by a limited warranty against defects in material and workmanship for a period of five years after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.



WATER QUALITY SYSTEMS

EVERPURE-SHURFLO WORLD HEADQUARTERS, 1040 MUIRFIELD DRIVE, HANOVER PARK, IL 60133 USA • FOODSERVICE.PENTAIR.COM
800.942.1153 (US ONLY) • 630.307.3000 MAIN • 630.307.3030 FAX • CSEVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO AUSTRALIA, 1-21 MONASH DRIVE, DANDENONG SOUTH, VIC 3175 AUSTRALIA
011.1300 576 190 TEL • 011.61.39.562.7237 FAX • AU.EVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO CHINA, 21F CLOUD 9 PLAZA, NO 1118, SHANGHAI, 200052, CHINA
86.21.3211.4588 TEL • 86.21.3211.4580 FAX • CHINA.WATER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO INDIA, GREEN BOULEVARD, B-9/A, 7TH FLOOR - TOWER B SECTOR 62, NOIDA - 201301
91.120.419.9444 TEL • 91.120.419.9400 FAX • INDIACUSTOMER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO EUROPE, PENTAIR WATER BELGIUM BVBA, INDUSTRIEPARK WOLFSTEE, TOEKOMSTLAAN 30, B-2200 HERENTALS, BELGIUM
+32.(0).14.283.504 TEL • +32.(0).14.283.505 FAX • SALES@EVERPURE-EUROPE.COM EMAIL

EVERPURE-SHURFLO JAPAN INC., HASHIMOTO MN BLDG. 7F, 3-25-1 HASHIMOTO, MIDORI-KU, SAGAMIHARA-SHI KANAGAWA 252-0143, JAPAN
81.(0)42.775.3011 TEL • 81.(0)42.775.3015 FAX • INFO@EVERPURE.CO.JP EMAIL

EVERPURE-SHURFLO SOUTHEAST ASIA, 390 HAVELOCK ROAD, #04-01 KING'S CENTRE, SINGAPORE 169662
65.6768.5800 TEL • 65.6737.5149 FAX • CSEVERPURE@PENTAIR.COM EMAIL

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.