

EVERPURE® CLARIS FLOW METER EV4339-31

MONITORING SYSTEM FOR CLARIS FILTER CARTRIDGE SYSTEMS

Claris Flow Meter: EV4339-31



APPLICATIONS

Vending
Hotel
Restaurant
Cafe

FEATURES • BENEFITS

The programming and display unit provides the following information:

- Residual capacity of installed filter cartridge
- Filtrate volume of the last five (5) installed filter cartridges
- Operation time of the last five (5)
- Total filtrate volume since flow meter installation

The CLARIS Flow Meter has been developed specifically to monitor the usage rate of the CLARIS Water Filter System and to determine the optimum cartridge replacement interval. After setting the programming unit to monitor the specific filter size, the Claris Flow Meter continually measures the filtrate volume to calculate and display the remaining filtration capacity in liters. Once the available filtration capacity is exhausted or the maximum operation time has been reached the display unit indicates the filter cartridge replacement.

INSTALLATION TIPS

If mounting display to a wall, securely connect the display to the wall using suitable screws or mounting hardware.

Shut-off valve must be installed upstream of the filter.

Refer to Installation, Operation & Maintenance manual for flow meter start up and programming.

OPERATION TIPS

Change Claris Cartridge when its pre-calculated water volume has been reached or at least once per year.

Change cartridges when capacity is reached.


SIZING

Operating Pressure: 29 - 116 psi (2 - 8 bar)

Flow Rate: 2.64 - 26.4 gph (10 - 100 Lph)

EVERPURE® CLARIS FLOW METER

EV4339-31

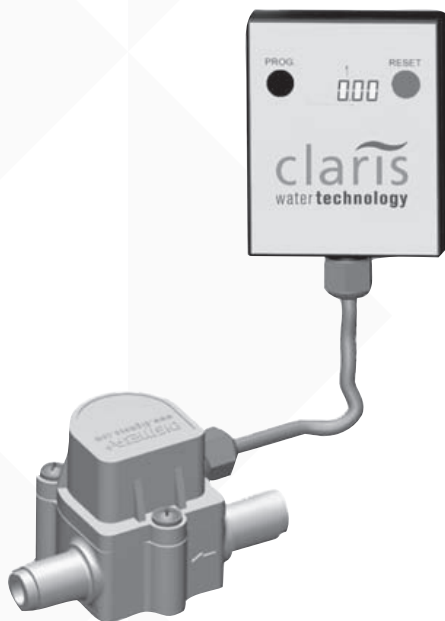

SPECIFICATIONS

SENSOR UNIT

Overall Dimensions
3.15" H x 1.81" W x 1.69" D
(8 cm x 4.5 cm x 4.2 cm)

Inlet Connection
3/8" BSP F Nut

Outlet Connection
3/8" BSP M

Operating Pressure
29 - 116 psi (2 - 8 bar)

Flow Rate
2.64 - 26.4 gph (10 - 100 Lph)

**Pressure Loss up to 26.4 gph (100 Lph)
Flow Rate**
3 psi (0.2 bar)

Precision (horizontal installation)
±5%

Water Temperature
39 - 86°F (4 - 30°C)

Ambient Temperature
39 - 104°F (4 - 40°C)

Installation Position
Horizontal recommended

PROGRAMMING AND DISPLAY UNIT

Overall Dimensions
1.97" H x 2.95" W x 67" L
(5 cm x 7.4 cm x 170.1cm)

Splash Proof
IPX4

Display 5 Digits
Counter 99999 - 9999 gallons
(Downwards 99999 - 9999 L)

Cable
59" (1.5 meters)

Clariss™ is a trademark of Aquis, GmbH

WARRANTY

Everpure Claris water treatment systems by Pentair® are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. Everpure replaceable elements (filter cartridges and water treatment cartridges) are covered by a limited warranty against defects in material and workmanship for a period of one year after date of purchase. See printed warranty for details. Pentair will provide a copy of the warranty upon request.



WATER QUALITY SYSTEMS

EVERPURE-SHURFLO WORLD HEADQUARTERS, 1040 MUIRFIELD DRIVE, HANOVER PARK, IL 60133 USA • FOODSERVICE.PENTAIR.COM
800.942.1153 MAIN (US ONLY) • 630.307.3000 MAIN • 630.307.3030 FAX • CSEVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO AUSTRALIA, 1-21 MONASH DRIVE, DANDENONG SOUTH, VIC 3175, AUSTRALIA
011.1300.576.190 TEL • 011.61.39.562.7237 FAX • AU.EVERPURE@PENTAIR.COM EMAIL

EVERPURE-SHURFLO CHINA, 21F CLOUD 9 PLAZA, NO 1118, SHANGHAI, 200052, CHINA
86.21.3211.4588 TEL • 86.21.3211.4580 FAX • CHINA.WATER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO INDIA, GREEN BOULEVARD, B-9/A, 7TH FLOOR - TOWER B SECTOR 62, NOIDA - 201301
91.120.419.9444 TEL • 91.120.419.9400 FAX • INDIACUSTOMER@PENTAIR.COM EMAIL

EVERPURE-SHURFLO EUROPE, PENTAIR WATER BELGIUM BVBA, INDUSTRIEPARK WOLFSTEE, TOEKOMSTLAAN, 30 B-2200 HERENTALS, BELGIUM
+32.(0).14.283.500 TEL • +32.(0).14.283.505 FAX • SALES@EVERPURE-EUROPE.COM EMAIL

EVERPURE-SHURFLO JAPAN INC., HASHIMOTO MN BLDG. 7F, 3-25-1 HASHIMOTO, MIDORI-KU, SAGAMIHARA-SHI KANAGAWA 252-0143, JAPAN
81.(0)42.775.3011 TEL • 81.(0)42.775.3015 FAX • INFO@EVERPURE.CO.JP EMAIL

EVERPURE-SHURFLO SOUTHEAST ASIA, SOUTHEAST ASIA, 390 HAVELOCK ROAD, #04-01, KING'S CENTRE, SINGAPORE 169662
65.6768.5800 TEL • 65.6737.5149 FAX • CSEVERPURE@PENTAIR.COM EMAIL

All Pentair trademarks and logos are owned by Pentair, Inc. or its affiliates. All other registered and unregistered trademarks and logos are the property of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice. Pentair is an equal opportunity employer.